


TANILED



CONTACT US

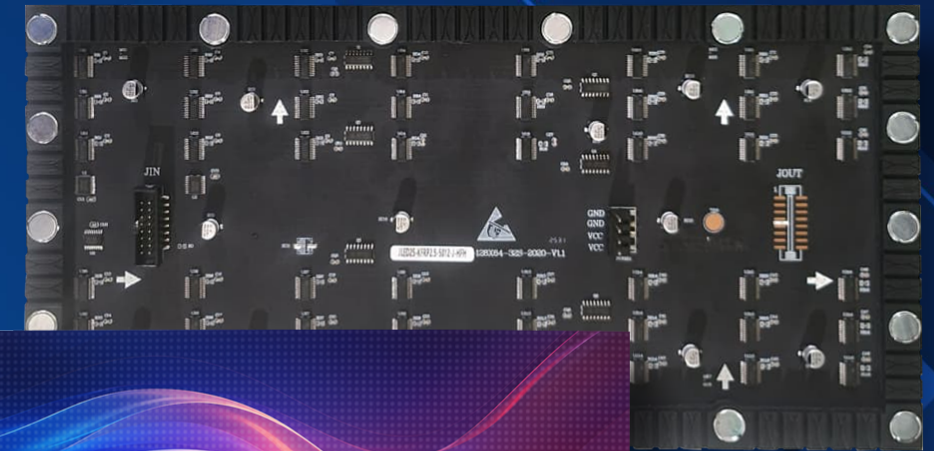

Komplek Perkantoran Multiguna Kemayoran
Blok 5 OK Jl. Rajawali Selatan Raya Kavling
C-5 No. 2 Kel. Pademangan Timur,
Kec. Pademangan, Jakarta Utara, DKI Jakarta - 14410
Telp : 021 - 6412557

GOB Flexible
Modular Series
Glue-On-Board Modular Indoor

1.53

PROJECT IMPLEMENTATION

PRODUCT SPECIFICATION

LOBBY



RETAIL



GALLERY



ENTERTAINMENT (RESTAURANT, CLUB)



Parameter	Value
Pixel Pitch (mm)	1.53
LED Type	GOB
Pixel Density (Pixel/m ²)	427.186
Modul Size (W*H, mm)	320 x 160
Modul Resolution (W*H, pixel)	208 x 104
Module Weight (Kg)	0,274
Brightness (cd/m ²)	450 - 500
Recommend View Distance (m)	≥1,5m-25m
Refresh Rate (Hz)	7680 Hz
Viewing Angel (H/V)°	140 /140
Module IP Rate	Front IP65, rear IP30
Power Consumption (Max. AVG.) (W/m ²)	391W/m ² 195W/m ²
Operating Temperature Range (°C)	-10~50
Operating Humidity Range (RH)	10%~65%
Maintenance	Front
Lifespan(Hours)	100,000

Catatan:

Disarankan menyiapkan spare daya sekitar 30% agar LED Display bekerja lebih stabil dan menghadirkan performa terbaik setiap saat

TANILED GOB Flexible uses Glue on Board (GOB) technology to provide maximum protection for the LED surface. It offers higher resistance to impact, dust, and high humidity, ensuring stable and reliable performance for long-term use in various environmental conditions.