


TANILED



CONTACT US

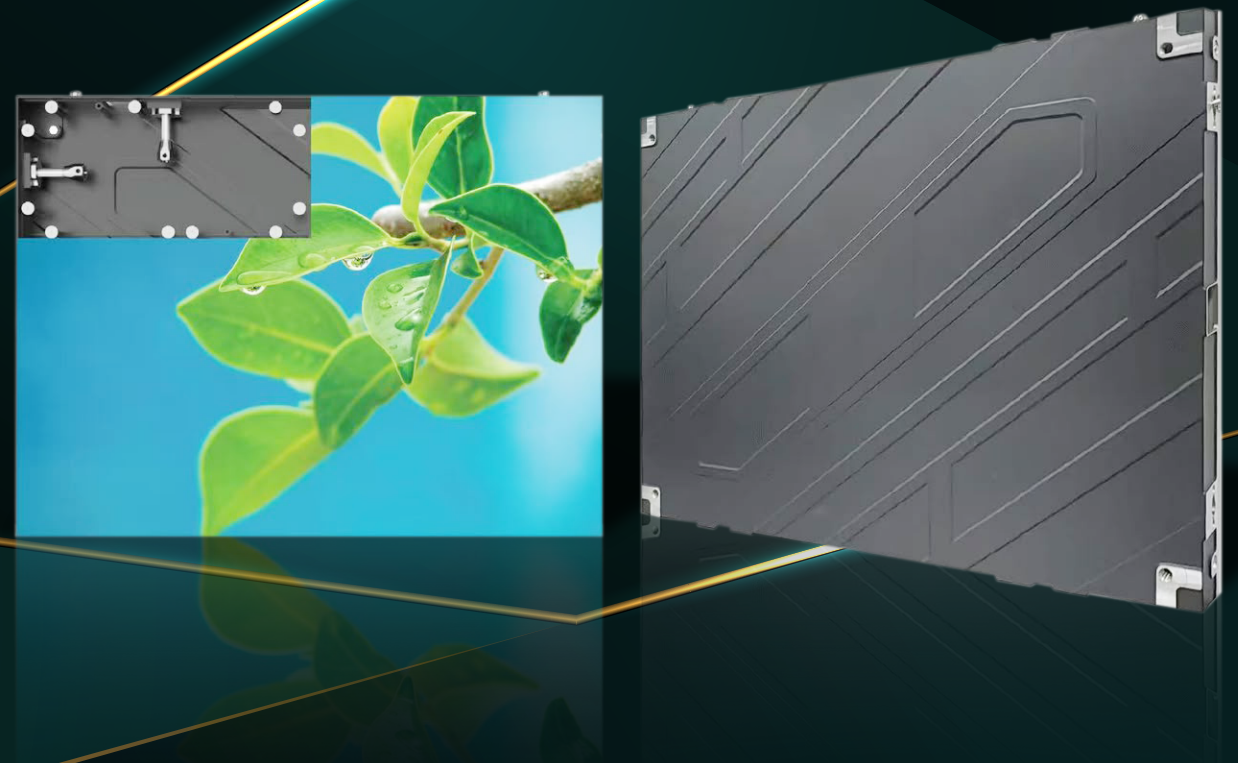

Komplek Perkantoran Multiguna Kemayoran
Blok 5 OK Jl. Rajawali Selatan Raya Kavling
C-5 No. 2 Kel. Pademangan Timur,
Kec. Pademangan, Jakarta Utara, DKI Jakarta - 14410
Telp : 021 - 6412557

METACAST
Series
LED Indoor Die-Casting Cabinet

1.86

PROJECT IMPLEMENTATION



AUDITORIUM



MULTIFUNCTION ROOM



RETAIL



WORSHIP

PRODUCT SPECIFICATION

Parameter	Value
Pixel Pitch (mm)	1.86
LED Type	SMD
Modul Size (W*H, mm)	320 x 160
Modul Resolution (W*H, pixel)	172 x 86
Cabinet Size (W*H, mm)	640 x 480
Cabinet Resolution (W*H, pixel)	344 x 258
Cabinet Weight (Kg)	≥6.5
Material	Die-cast Aluminum Cabinet
Pixel Density (Pixel/m²)	289.000
Brightness (cd/m²)	≥ 600 cd
Grayscale (bit)	12 ~ 14
Contrast Ratio	4000:1
Power Consumption (Max. AVG.) (W/m²)	580 W/m²/240 W/m²
Refresh Rate (Hz)	≥3840Hz
Viewing Angel (H/V)°	160/160
IP Rate (Front/Rear)	IP40/IP21
Recommend View Distance (m)	≥1.8m~25m
Operating Humidity Range (RH)	10%~95%
Operating Temperature Range (°C)	-20°~+60°
Maintenance	Front
Lifespan(Hours)	100.000

Catatan:
Disarankan menyiapkan spare daya sekitar 30% agar LED Display bekerja lebih stabil dan menghadirkan performa terbaik setiap saat

TANILED METACAST “Where Innovation Meets Die-Cast Precision”
Advanced die-cast aluminum engineering designed to deliver seamless
visuals and professional-grade reliability.