


TR-oX-SPECIFICATION

Items	Value
LED Type	1R1G1B
Pixel pitch(mm)	3.91
Pixel density(Dots/m ²)	65,536
Module size(mm)	250x250
Module resolution(pixels)	64x64
Module weight(kg)	0.46
Cabinet size(mm)	500x500
Cabinet resolution(pixels)	128x128
Cabinet weight(kg)	7.8
Brightness(cd/m ²)	5000
Recommened view distance(m)	2.6-20
Refresh Rate	3840
Viewing Angle (H/V)	140 / 140
Power Consumption (Max./Avg.)	720W/m ² ; /235W/m ²
Operating Temperature Range (°C)	-20~+60
Operating Humidity Range (RH)	10%~95%
Lifespan(Hours)	100,000
Warranty(years)	1

TANILED

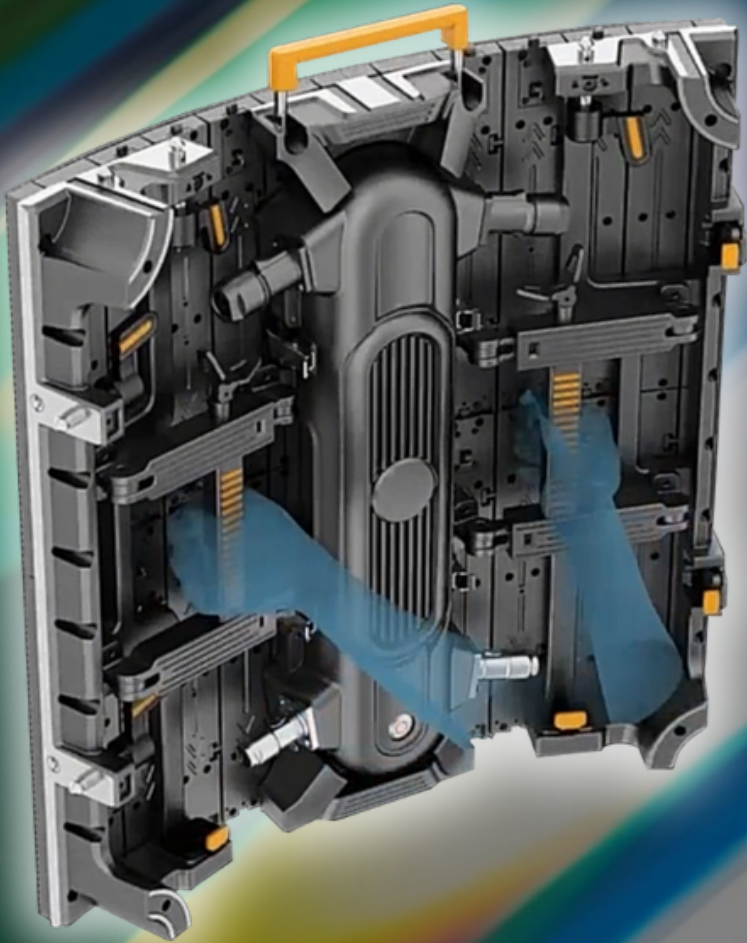

TR-oX OUTDOOR SERIES

Contact Us :

Komplek Perkantoran Multiguna Kemayoran Blok 5 OK
Jl. Rajawali Selatan Raya Kavling C-5 No.2 Kel.
Pademangan Timur, Kec. Pademangan Jakarta Utara,
DKI Jakarta – 14410
Telp : 021-6412557

IMPLEMENTATION



TANILED